

**Mine Master Ltd.**

Wilków, ul. Dworcowa 27  
59-500 Złotoryja  
tel.: 76 877 81 01, fax: 76 878 41 01

info@minemaster.eu  
www.minemaster.eu




# Face Master 2.5NVDR

Narrow vein single boom drilling rig

- Diesel powered articulated chassis with permanent 4-wheel drive
- Hydrostatic brakes with additional fail-safe emergency-parking brake
- Latest concept heavy duty alloy profile feeder with stainless steel guide surfaces. Designed to improve performance and reduce operation costs.
- Minimum tramming height – 2.5m
- Full hydraulic proportional boom control by joystick. Shock protection is provided.
- Hydraulically adjustable operator's protection canopy conforming to FOPS and ROPS regulations.
- Reliable hydraulic controls – ensuring low operating costs and high performance.
- Head Rotation Boom, equipped with two-axial hydraulic actuator. The boom can be used for cross-cutting as well as vertical drilling.

# Face Master 2.5NVDR

Narrow vein single boom drilling rig

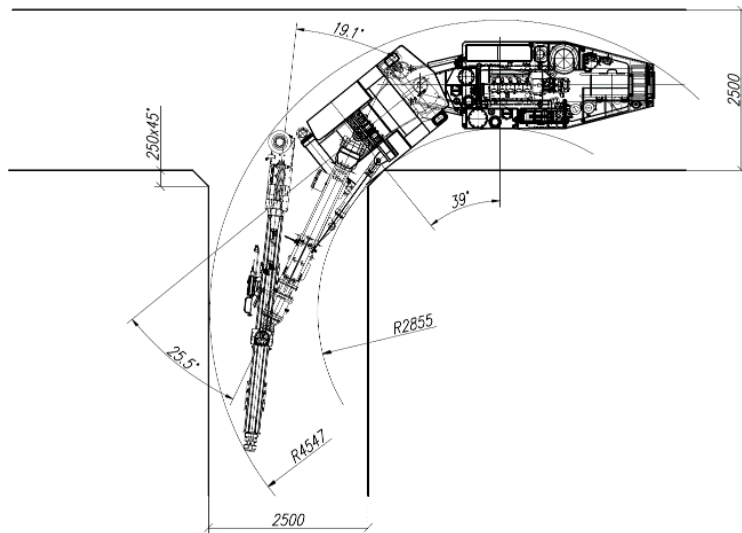


## Main components

- Rotary-percussive rockdrill – Montabert HC109
- Feeder F-7000 series
- Boom – B25
- Deutz diesel engine
- Tyres 10.00 x 15"
- Hydraulically operated operator's canopy
- Typical installed electric power – 55kW
- Axial piston pump with load sensing controls
- Water booster pump
- Air compressor
- Trimming and working lights

## Options

- Water hose reel with water hose
- Automatic centralized lubrication system
- Fire suppression system with flame detection
- By-pass filtration
- Voltage – to suit customer's requirements
- Electric cable reel with electric cable

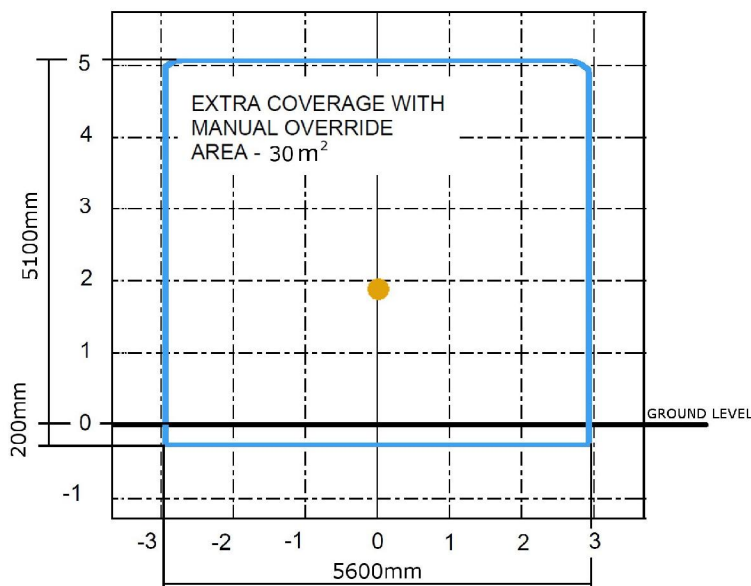

**COVERAGE with B25 boom with 1000mm extension**

## Weight and dimensions

Weight	13 300 kg
Length with 10ft feeder	10 200 mm
Width	1 350 mm
Min. height	2 500 mm
Min. seam width	2 655 mm
Grade ability	10°
Cross-grade	3°
Boom extension	1 000 mm
Boom lift	+41/-25°
Boom swing	+/- 27°
Feeder rotation 2-rotary actuator	360° /360°
Feeder crowd	1 100 mm
Feeder dump	+30/-50°